




HDSGSPR-360


**STANDARD FEATURES**

- Construction of SS304 top range and flue riser, SS201 front panel, with SS430 sides and bottom shelf
- Individually controlled burner rings by triple brass valve permit a wide range of heating selections from simmering to intense heat.
- High efficiency 3-rings cast iron burners rated 90,000 Btu each
- Standby SS430 pilot for easy start, easy access to brass pilot valve adjustment screws
- 20" x 20" heavy duty cast iron top grates
- Reinforced structure to accommodate the heaviest utensils
- SS201 Legs supported by adjustable SS201 bullet feet
- Supporting SS430 shelf underneath provides a convenient storage area
- Removable aluminized drip pans under burners to collect spillage
- Easy gas conversion in field
- 3/4" NPT rear gas connection

- **Gas Products available in either Natural or LP Gas setup**
- **Thermostats (if applicable) available in either Fahrenheit or Celsius**

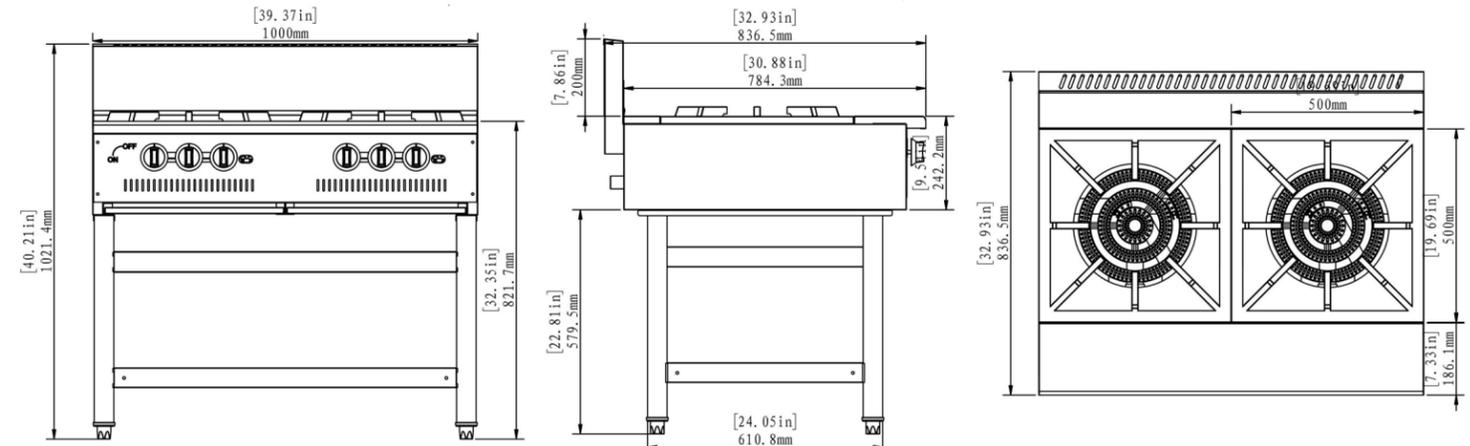

HDSGSPR-240

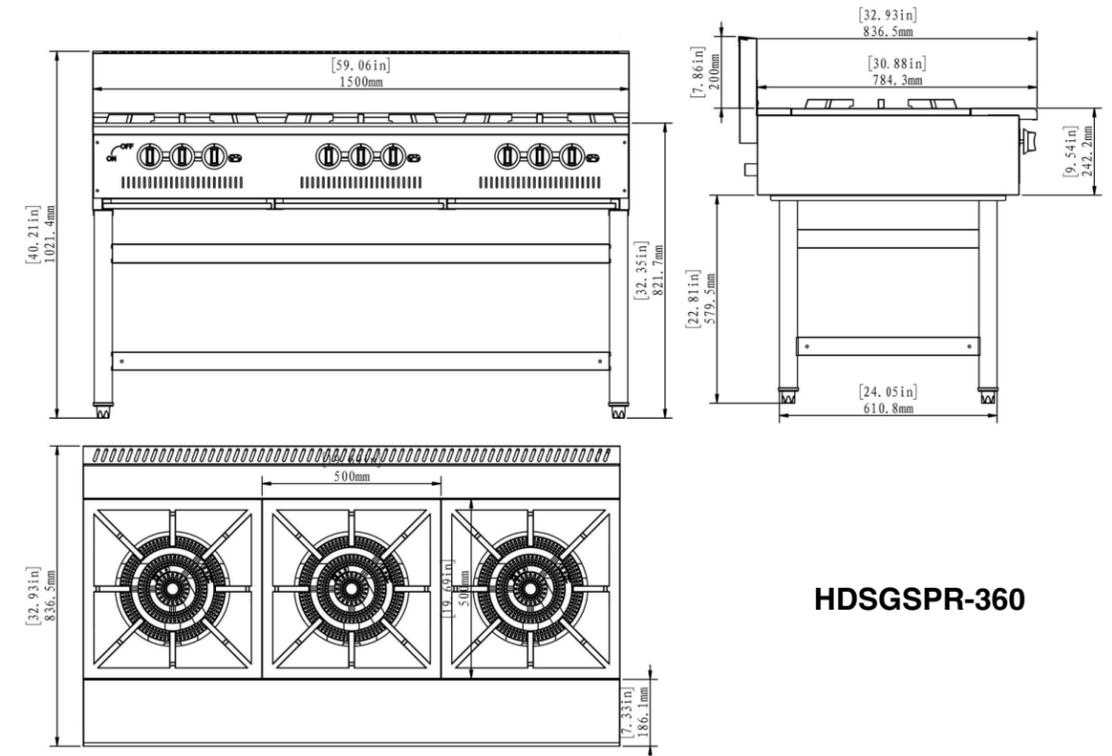

HDSGSPR-360

MODEL	DESCRIPTION	TOTAL INPUT (btu/hr)	PRODUCT (WxDxH)	PACKING (WxDxH)	NW	GW
HDSGSPR-240	Gas Stock Pot Range - 2 Burner	180,000	1000 x 837 x 1021 mm 39.4 x 32.9 x 40.2 inch	1280 x 940 x 540 mm 50.4 x 37 x 21.3 inch	68 KG 150 LBS	86 KG 190 LBS
HDSGSPR-360	Gas Stock Pot Range - 3 Burner	270,000	1500 x 837 x 1021 mm 59.1 x 32.9 x 40.2 inch	1630 x 940 x 540mm 64.2 x 37 x 21.3 inch	89 KG 195 LBS	110 KG 242 LBS

sales@heavydutysystems.com