



HRU2 - Glass Doors

On the inside, a modern professional refrigeration system with the latest energy-efficient features and perfect temperature control. On the outside, vintage retro styling that makes a striking focal point of any bar or kitchen. It's cutting edge technology perfectly combined with classic vintage looks.

Like every Precision product, the Retro range boasts a host of features that are either aesthetically stunning, hugely practical, or both.

Give us a RAL number and we'll paint your retro refrigerator to match any colour you can dream of.

Key Features:

Stainless Steel Interior & Exterior

Bottom Mounted Refrigeration System Designed To Work In 43°C Ambient

Built-In Air Rear Duct For Even Temperature Distribution

R290 Refrigerant

Zero ODP Injected Polyurethane Insulation

+1 / 4°C Refrigerator & -18 / -22°C Freezer Temperature Range

Electronic Controller With LED Display Discreetly Positioned Inside The Cabinet For Ease Of Access

Automatic Defrost

Rifle Bore Coated Evaporators

Retro Styled Ultra Heavy Duty Chrome Handles & Hinges

LED Lighting (6500K Daylight White)

Adjustable Perforated Stainless Steel Shelves

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Adjustable Legs Covered By Colour Coded Covers



Reeded Glass Option



Retro Handles

Options:

Glass Doors - Clear or Reeded Glass

Castors (No Covers)




Freezer Compartment In Bottom Left Section

Painted Exterior (To Any RAL Colour)

Meat Hanging Rail

Meat Ageing Model

Precision Connect

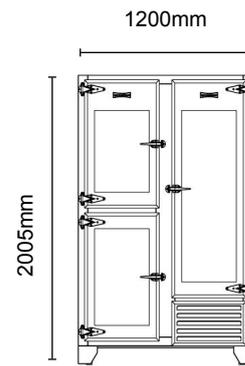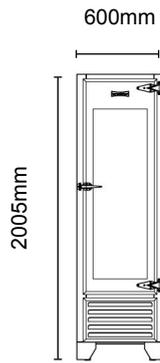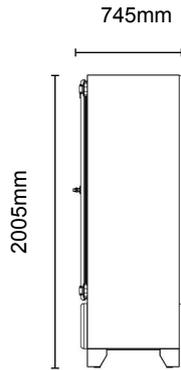

HRU1

HRU2/HLRU2

Model	HRU1	HRU2	HLRU2
Type	Refrigerator	Refrigerator	Refrigerator / Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	455x448	525x443 and 455x448	525x443 & 455x448
Number of Shelves	4	7	6
Temperature Range	+1/4°C	+1/4°C	+1/4°C & -18/-22°C
Exterior WxDxH (mm)	600x745x2005	1200x745x2005	1200x745x2005
Net Usable Volume (litres)	240	588	255 & 128
Weight (KG)	110	200	215
Refrigerant / GWP	R290 / 3	R290 / 3	R290 / 3
Refrigeration Watts (+45°C Condensing)	411	393	393 / 208
Evaporating Temp	-10°C	-10°C	-10°C / -30°C
Heat Rejection Watts*	638	590	590 / 312
Noise Output (dBa)	58	62	77
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	0.88	1.35	3
Total Electrical Load - kW	0.20	0.31	0.69
Energy Consumption / 24hrs - kWh**	1.34	2.94	N/A
Energy Consumption / Year (AEC) - kWh**	489	1073	N/A
Energy Efficiency Class**	C	D	N/A

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated using total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please scan QR code for the most up-to-date version of this spec sheet:

